

TN40

TN50

TN60

TNA30




BID SPECIFICATIONS

STANDARD

- * LED LIGHTING
- * DOUBLE PANE SLIDING BACK GLASS DOORS
- * DOUBLE PANE GLASS FRONT AND SIDES
- * HYDRAULIC LIFT UP FRONT GLASS
- * BACK & INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * SELF CONTAINED AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * SILVER ANODIZED ALUMINUM FINISH

- * MULTIPLEXING CAPABILITY WITH GELATO, PASTRY, DELI, AND CHOCOLATE CASE APPLICATIONS
- * THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR: 1 YEAR PARTS AND LABOR

Easy Delivery




Only 35.25" Deep


OPTIONAL

- * CASTERS
- * REMOTE CONDENSING UNIT
- * PLEXIGLASS SHELF PRODUCT GUARD
- * REAR AIR INTAKE DISCHARGE (TN50 & TN60)
- * DECORATIVE END PANELS

- * FACTORY STANDARD MATTE WHITE FRONT AND SIDE PANELS



STANDARD END PANEL




DECORATIVE END PANEL (OPTIONAL)
ADD 1.50" TO TOTAL LENGTH

Italiana Deli & Pastry Case Technical Specifications

Refrigerated Deli & Pastry: "TN"

Models	Case Height	* Case Lengths	Depth	Crated Weights (lb)	Line Voltage	Breaker Sizes	Amp Draws	Working Temp F	Comp. HP
TN40	54.00"	41.50"	35.25"	845	115/1/60	20 amp	10	38-41	1/2 HP
TN50	54.00"	51.50"	35.25"	973	115/1/60	20 amp	12	38-41	1/2 HP
TN60	54.00"	61.50"	35.25"	1048	115/1/60	30 amp	12	38-41	3/4 HP
TNA30	54.00"	* A & B *	35.25"	995	115/1/60	20 amp	12	38-41	3/4 HP

* Case lengths are specified with standard end panels

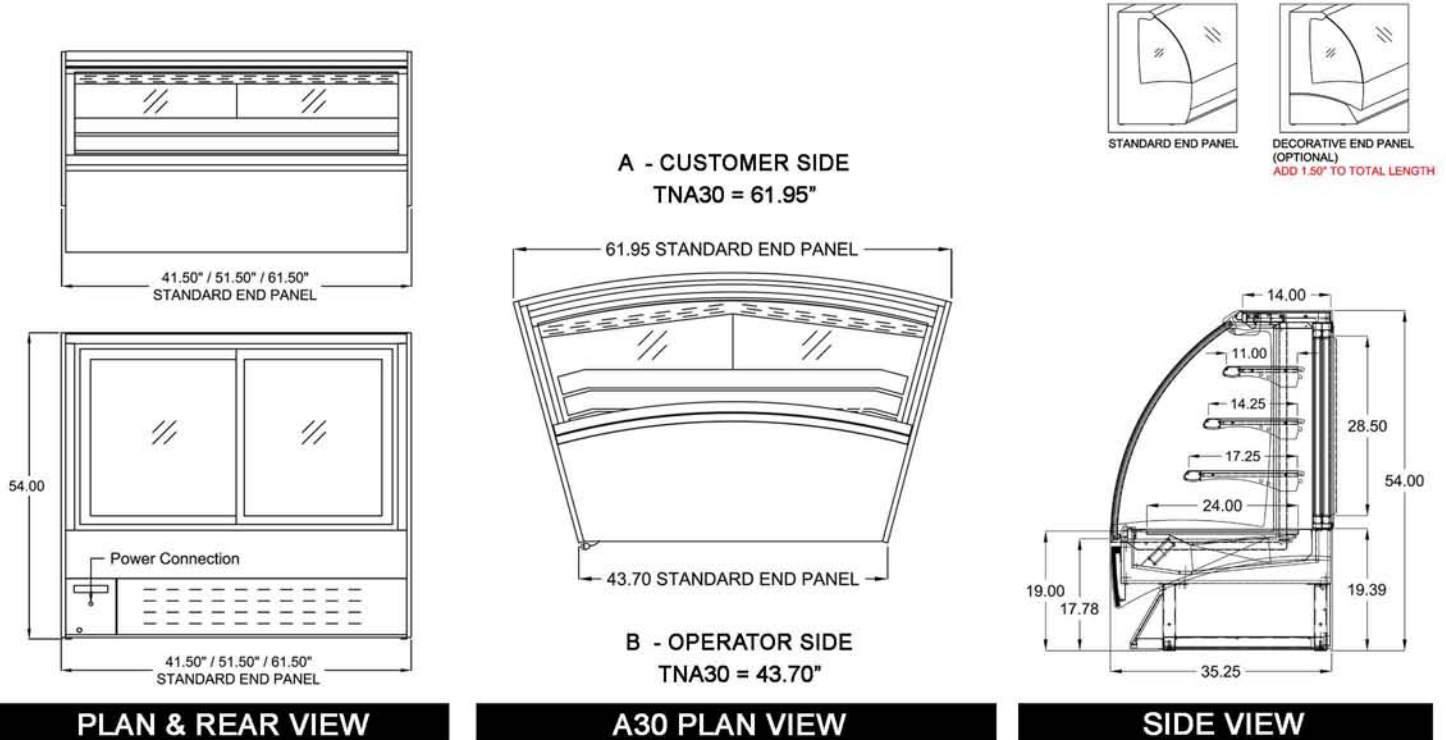

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO USA INC.
2556 Barrington Court,
Hayward, CA 94545 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-america.com>