



BID SPECIFICATIONS

STANDARD

- * ALL TEMPERED, DOUBLE PANE GLASS ON ALL SIDES
- * ADJUSTABLE TEMPERED GLASS SHELVES
- * MEDIUM TEMPERATURE APPLICATION
- * SINGLE GLASS HINGED (LEFT OR RIGHT)
- * LED LIGHTING MOUNTED ON TOP & SIDES
- * MATCHES / MULTIPLEX TO THE 24H & LA ROSSA LINE
- * CHASSIS CONSTRUCTION MADE OF ANODIZED ALUMINUM
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * REMOVABLE STAINLESS STEEL DECK
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * SELF-CONTAINED, AIR-COOLED CONDENSING UNIT
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * THE STANDARD LIMITED WARRANTY INCLUDES:
5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL

- * CASTERS
- * REMOTE CONDENSING UNIT
- * HUMIDITY CONTROL
- * 5" BASE SIDE PANEL
- * OPTIONAL COLORS




24h Vertical Ventilation Technical Specifications

Model no.	Case Height	Case Length (Option #1)	* Case Depth (Option #1)	Case Length (Option #2)	* Case Depth (Option #2)	Crated Weights (lb)	Line Voltage	Amp Draws	Working Temp F
L700	61.41"	27.56"	32.28"	29.06"	36.28"	585	220/1/60	10	38 - 41
L1000	61.41"	39.36"	32.28"	40.86"	36.28"	663	220/1/60	12	38 - 41

* Case depth includes base


OPTION #1

DIMENSIONS WITHOUT PANELS

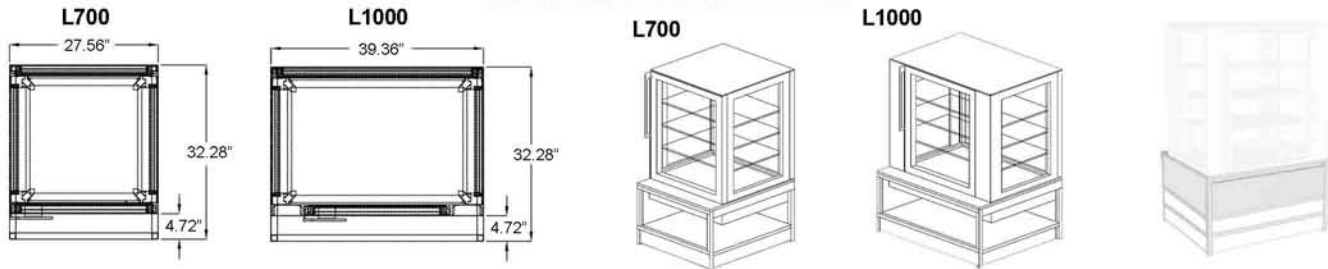

OPTION #2

DIMENSIONS WITH FACTORY FINISHED PANELS

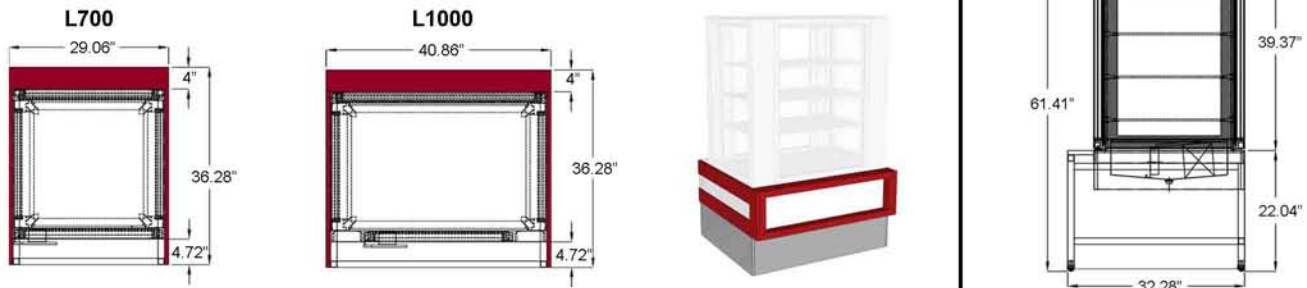

PLAN VIEWS / SIDE VIEW (SHOWN WITHOUT PANELS) / 3D VIEWS (FRONT & REAR)

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO USA INC.
2556 Barrington Court,
Hayward, CA 94545 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-america.com>