


KG30EXT
KG30EXT-T

KG45EXT
KG45EXT-T



| Available Heights: | |
|--------------------|--------|
| 51.96" | 57.08" |

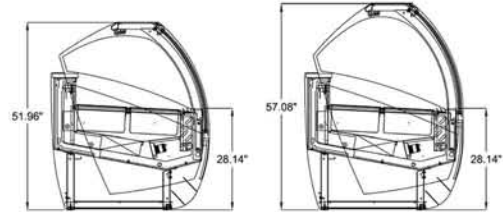

BID SPECIFICATIONS

STANDARD

- * 28" HIGH DISPLAY ABOVE FINISHED FLOOR
- * ALL TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * BACK & INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR PLEXIGLASS SLIDING DOORS
- * AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN
- * REMOVABLE STAINLESS STEEL DECK
- * HYDRAULIC LIFT UP FRONT GLASS
- * SILVER ANODIZED ALUMINUM TRIM
- * STAINLESS STEEL WORK SURFACE
- * MULTIPLEXING CAPABILITY WITH PASTRY, DELI, AND CHOCOLATE CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * DISPLAY CASE(S) HAVE INTERGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- * THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED

OPTIONAL

- * LED LIGHTING
- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * REMOTE CONDENSING UNIT
- * PANS NOT INCLUDED
- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)




Korea Gelato / Ice Cream Curved Case Technical Specifications

| Curved Cold Cases | | | | | | | | | | | BTUs | | Pan Capacity | | Comp. HP |
|-------------------|---------------|---------------|--------------|----------------|------------|---------------------|--------------|--------------|----------|-----------------------|----------------|---------|--------------|----------|----------|
| Updated Model no. | Old Model No. | Factory Codes | Case Heights | * Case Lengths | Case Depth | Crated Weights (lb) | Line Voltage | Breaker Size | Amp Draw | -20 Evap Temp (R404a) | Working Temp F | 5 Liter | 12 Liter | | |
| KG30EXT | C83FK-30*EXT | GA30 | 51.96" | * A & B * | 43.85" | 1020 | 220/1/60 | 20amps | 10 | 3069 | -10 to +10 | 12 | 8 | 1 1/2 HP | |
| KG30EXT-T | C83FK-30*EXT | GA30 | 57.08" | * A & B * | 43.85" | 1020 | 220/1/60 | 20amps | 10 | 3069 | -10 to +10 | 12 | 8 | 1 1/2 HP | |
| KG45EXT | C83FK-45*EXT | GA45 | 51.96" | * A & B * | 43.85" | 844 | 220/1/60 | 20amps | 10 | 3069 | -10 to +10 | 9 | 5 | 1 1/2 HP | |
| KG45EXT-T | C83FK-45*EXT | GA45 | 57.08" | * A & B * | 43.85" | 844 | 220/1/60 | 20amps | 10 | 3069 | -10 to +10 | 9 | 5 | 1 1/2 HP | |


T = TALL * Case lengths are specified with standard end panels

A - Customer Side
KG30EXT = 62.65"

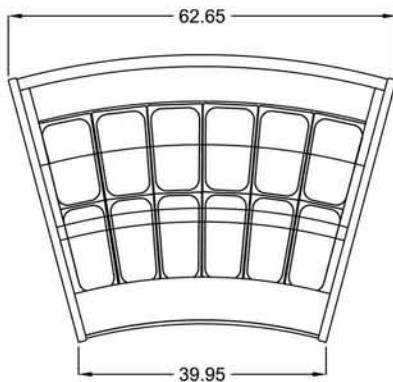

B - Server Side
KG30EXT = 39.95"

A - Customer Side
KG45EXT = 57.67"

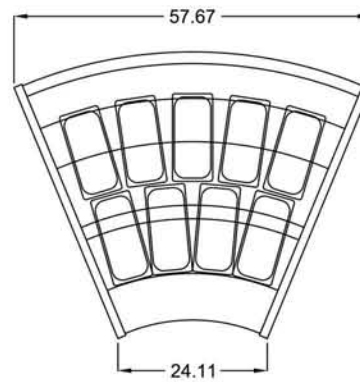

B - Server Side
KG30EXT = 24.11"

PLAN / TOP VIEWS OF CURVED CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO USA INC.
2556 Barrington Court,
Hayward, CA 94545 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-america.com>