


C83F-KT24-G30EXT
C83F-KT24-G30EXT-T

C83F-KT24-G30INT

C83F-KT24-G45EXT
C83F-KT24-G45EXT-T

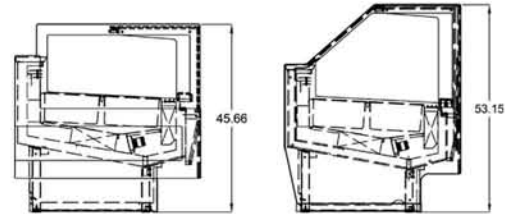

BID SPECIFICATIONS

STANDARD

- * ALL CLEAR PLEXIGLASS TOP SUPPORT STRUCTURE (FIG.1)
- * LED LIGHTING
- * TILT BACK FRONT GLASS
- * ALL TEMPERED, DOUBLE PANE HEATED GLASS ON FRONT AND SIDES
- * GALVANIZED STEEL CHASSIS CONSTRUCTION
- * INSULATED WITH DENSE NON-CFC ECOLOGIC POLYURETHANE FOAM
- * BACK & INSIDE STRUCTURE MADE OF HIGH GLOSS 304 STAINLESS STEEL
- * DIGITAL DIAGNOSTIC CONTROL SYSTEM WITH PROGRAMMABLE DEFROSTING
- * REAR PLEXIGLASS SLIDING DOORS
- * AIR-COOLED CONDENSING UNIT
- * UNIQUE FAN ASSISTED AIRFLOW DESIGN

- * INCLINE DISPLAY
- * REMOVABLE STAINLESS STEEL DECK
- * SILVER ANODIZED ALUMINUM TRIM
- * STAINLESS STEEL WORK SURFACE
- * BACK PAINTED GLASS ON FRONT FACIA
- * MULTIPLEXING CAPABILITY WITH PASTRY, DELI, AND CHOCOLATE CASE APPLICATIONS
- * DISPLAY CASE(S) TO BE SHIPPED FULLY ASSEMBLED
- * DISPLAY CASE(S) HAVE INTERGRATED ELECTRONIC TIME AND TEMPERATURE CONTROLLER(S) WITH HOT GAS DEFROST STANDARD ON GELATO MODELS
- * THE STANDARD LIMITED WARRANTY INCLUDES: 5 YEAR COMPRESSOR; 1 YEAR PARTS; 90 DAYS LABOR
- * DISPLAY CASE(S) TO BE LABORATORY CERTIFIED AS DESCRIBED



FIG.1

OPTIONAL

- * CASTERS
- * GRANITE WORK SURFACE (OPERATOR SIDE)
- * REMOTE CONDENSING UNIT

- * PANS NOT INCLUDED



- * SIDE & FRONT PANELS PAINTED IN A GLOSSY FINISH (CASE SHIP IN BUFF WHITE PRIMER)



KT24 Gelato / Ice Cream Curved Case Technical Specifications


Curved Cold Cases

Updated Model no.	Factory Codes	Case Heights	* Case Lengths	Case Depth	Crated Weights (lb)	Line Voltage	Breaker Size	Amp Draw	BTUs		Pan Capacity		
									-20 Evap Temp (R404a)	Working Temp F	5 Liter	12 Liter	Comp. HP
C83F-KT24-G30EXT	GA30	45.66"	*A & B*	45.12"	723	220/1/60	20amps	10	5285	-10 to + 10	13	8	1 1/2 HP
C83F-KT24-G30EXT-T	GA30	53.15"	*A & B*	45.12"	875	220/1/60	20amps	10	5285	-10 to + 10	13	8	1 1/2 HP
C83F-KT24-G30INT	GC30	45.66"	*A & B*	45.12"	934	220/1/60	20amps	10	5285	-10 to + 10	13	8	1 1/2 HP
C83F-KT24-G45EXT	GA45	45.66"	*A & B*	45.12"	875	220/1/60	20amps	10	4092	-10 to + 10	9	5	1 1/2 HP
C83F-KT24-G45EXT-T	GA45	53.15"	*A & B*	45.12"	934	220/1/60	20amps	10	4092	-10 to + 10	9	5	1 1/2 HP

T = TALL


* Case lengths are specified with standard end panels

A - Customer Side
KT24-G30EXT = 62.23"

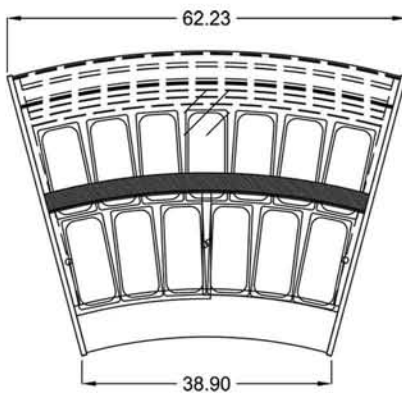


B - Server Side
KT24-G30EXT = 38.90"

A - Customer Side
KT24-G30INT = 37.40"

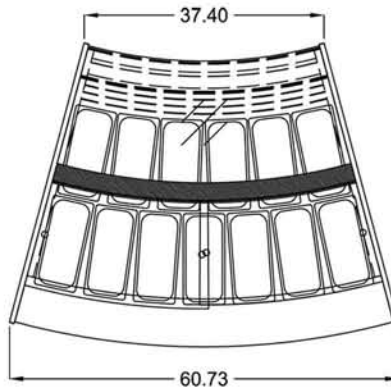

B - Server Side
KT24-G30INT = 60.73"

A - Customer Side
KT24-G45EXT = 57.56"

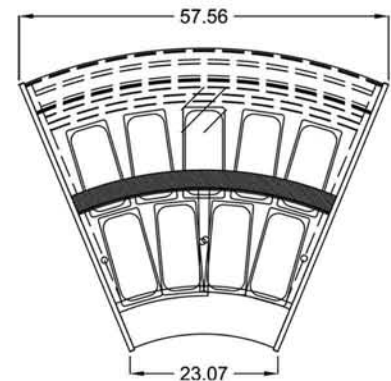

B - Server Side
KT24-G45EXT = 23.07"

PLAN / TOP VIEWS OF CURVED CASES

LISTINGS:



ELECTRICAL CONNECTION:

Display cases are shipped with applicable junction box for hardwired installation
Options exist for several NEMA configurations
Plug and/or receptacle configurations are at the discretion of the electrical installer

NOTE:

Required ambient conditions: 75°F; 55% RH
Drawing and Specifications are subject to change without notice

CLABO USA INC.
2556 Barrington Court,
Hayward, CA 94545 USA
PH 800.672.2784
FAX 510.441.0401
<http://www.otl-america.com>